

ALUMIINI





ALUMIINI

aluminum

Alumiini sets the standard for extruded aluminum profiles. With an extensive collection of inspired shapes and sizes, PMC offers the precise architectural style to complement or accent your space. Our signature profiles can provide lighting distributions as your application requires from fully indirect to multiple combinations of indirect and direct illumination, all while providing quality performance and uniformity. Made in the United States, rely on Alumiini to provide custom lengths, sizes, diffusers and finishes tailored to fit the unique needs of your application.



Amica Insurance Corporate Headquarters, Lincoln, RI
Alumiini series: E0395



Weymouth Library, Nova Scotia
Alumiini series: E0395



E17 Series



E0395 Series



E5051 Series



EISS Series

Alumiini inspires you with a full range of lighting distribution options that range from fully indirect to multiple combinations of direct/indirect to fully direct illumination.

Indirect / Indirect with Accent:

The products represented here offer features for applications that require mostly indirect illumination with a small degree of perceived brightness.

To accomplish this, Alumiini incorporates:

- Round perforations
- Square perforations
- Slots
- Acrylic lenses



Philadelphia, PA Airport, Terminal A
Alumiini Custom modified series: E418

Alumiini inspires you with a full range of lighting distribution options that range from fully indirect to multiple combinations of direct/indirect to fully direct illumination.

Direct / Indirect:

The products represented here offer features for applications that require a combination of direct/indirect illumination as well as fully direct applications.

To accomplish this, Alumiini incorporates:

- Semi-specular parabolic louvers
- White cross baffles
- White perforated cross baffles
- MR 16 downlights



E5059 Series



E5027 Series



E5051L Series



EISS Series



E418 Series




E5053 Series



E565 Series



Burberry Corporate Offices, Singapore
Alumiini series: E5053

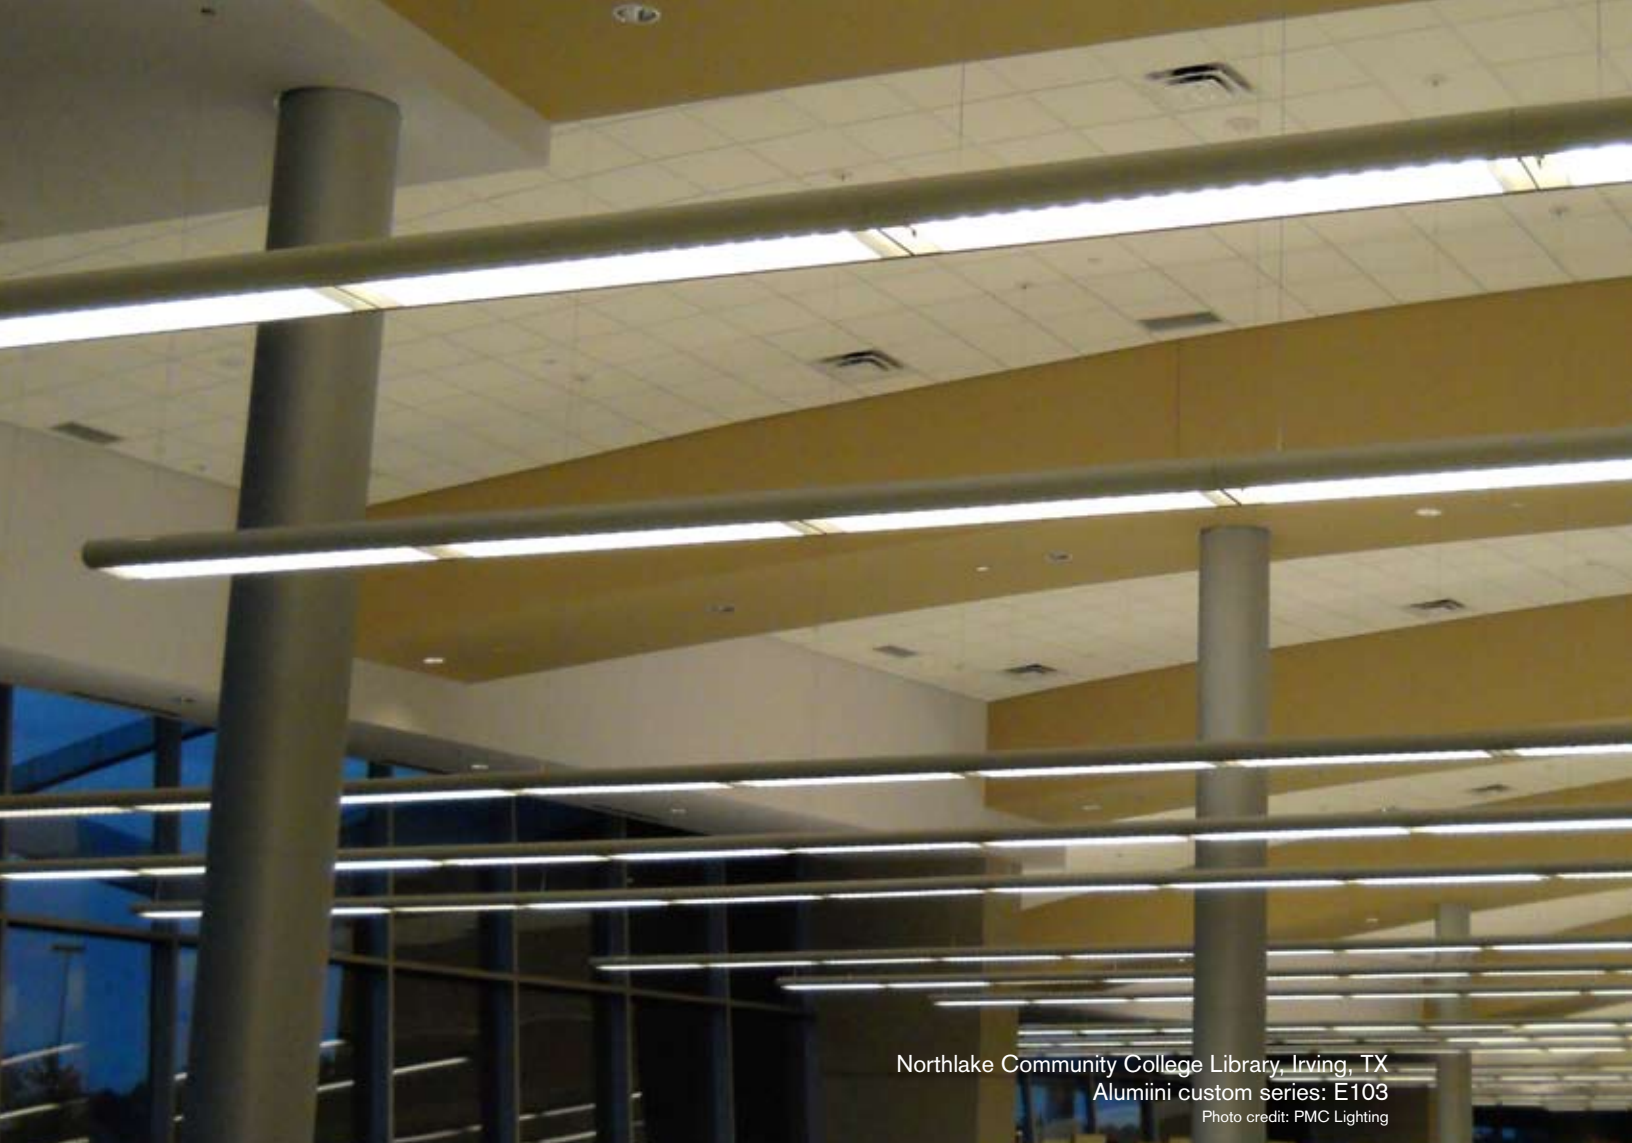


Northlake Community College Library, Irving, TX
 Alumiini custom series: E103
 Photo credit: PMC Lighting

To order a Alumiini product, select product data from each category below. Consult specification sheets available on our website – www.pmcighting.com to confirm availability of specific combinations of features and options.

MODEL NUMBER

1 – Series	2 – Output	3 – Mounting	4 – Lamp/Type	5 – Length	6 – Diffuser	7 –Color	8 – Voltage	9 – Options
------------	------------	--------------	---------------	------------	--------------	----------	-------------	-------------


1 – Series:

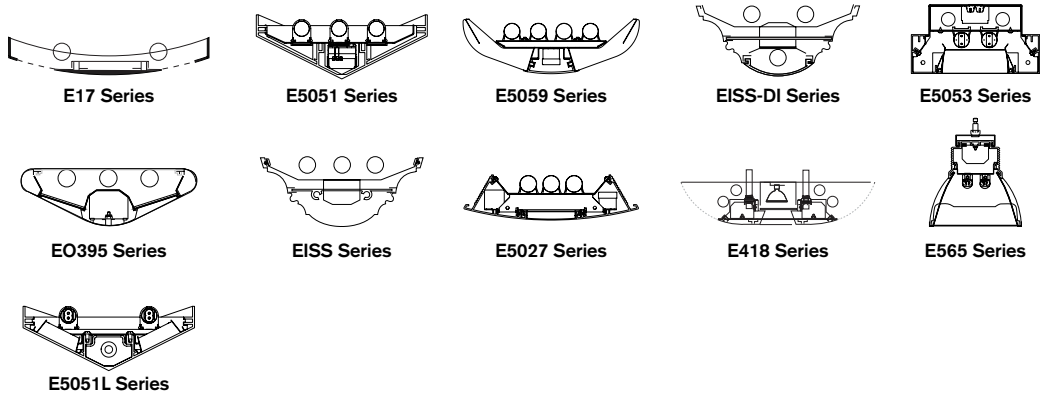

Alumiini specification data:

Alumiini offers our most innovative extruded aluminum profiles. Select from many options to tailor our offering to your specific application.

2 – Output:

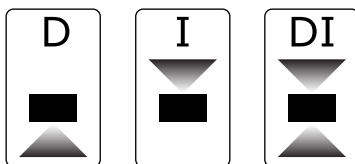

3 – Mounting:

AC—Adjustable aircraft cable (48" standard)
 P—Pendant mounting (24" standard)
 SP—Swivel pendant (up to 45°)
 W—Wall
 YAC—Y configuration aircraft cable assembly
 S—Surface

4 – Lamping Quantity & Type: 1/2/3 T5/T5HO/T8

5 – Lengths: 2'/3'/4'/6'/8' Nominal length, custom lengths available

6 – Diffusers:

SLT—Obround / gill slots on diagonal	PBL—Semi-specular parabolic louver
AO—Angled oval slots	P12—Prismatic lens
REC—Rectangular slots	WB—White cross baffle
SSLT—Square perforations	WB/PERF White perforated cross baffle
RSLT—Rhombus perforations	WOA—White acrylic lens
PERF—Integral perforation	FCA—Frosted clear acrylic

7 – Color: Finishes—Fixture finish is white polyester powder coated paint standard. Custom finishes are available. WHT (White) CA (Custom Finish)

8 – Voltage: 120/277/347

9 – Options:

- DIM—Dimming, consult factory
- EM—Emergency, consult factory
- GLR—Fusing
- 2CIR—2 circuit wiring
- CC—Coiled cord feed

Construction / Materials:

Housing is extruded and die formed aluminum with internal components of 20 gauge cold rolled steel. Louvers and lenses as indicated.



Labels—UL, CUL listed for damp location.

All fixtures are pre-wired and individually tested with electronic ballasts standard.



Data provided for general information. Consult product specification sheets at www.pmclighting.com for availability of specific combinations of features and options, full technical specifications and photometric data.

Sample photometry for typical Alumiini series:



To access our complete photometric data for this series, visit our website at www.pmclighting.com.

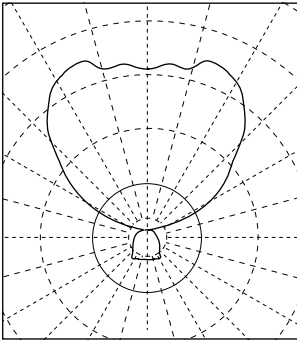

EO395-DI-2/T8-4-PERF
(2) 2950 Lumen Lamps

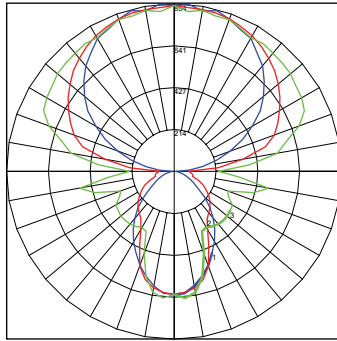

E5059-DI-2T5-4
(2) 2900 Lumen Lamps

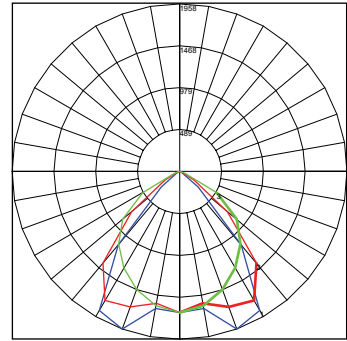

E565-2T5HO
(2) 5000 Lumen Lamps