

CLASSIC





Giant Foods, Hanover, PA
Classic series: S86
Photo credit: Terry Farrell

CLASSIC

timeless

The Classic series, by PMC Lighting, offers those simple tasteful standards that you recognize, but then we pack them with lighting options. Whether our product is the accent piece or the subtle reinforcing detail in your space, this series of luminaires is a robust workhorse, providing multiple sizes, lamping options, diffusers and mounting configurations to get the job done. When your project requires luminaires with a universal appeal, rely on PMC's Classic series to offer the depth of product line to satisfy all of your lighting needs.



Highland Park Middle School, University Park, TX
Classic series: EO V10
Photo Credit: PMC Lighting

Classic Aluminum Rounds and Ovals offer every combination of indirect and direct illumination that you will require. With multiple sizes and mounting options, you can mix and match this series to keep a consistent look in your space while fine-tuning the lighting performance to your application.



EO830



EO V10



ER4/ER6/ER9



ER59

T.W. 'TURK' CANNADY CEDAR HILL ROOM

Cedar Springs Municipal Building
Classic series: ER4



Sheboygan High School, Sheboygan, WI
Classic series: S86
Photo Credit: Bob Freund

Classic Steel Squares offer every combination of indirect and direct illumination that you will require. While maintaining a timeless universally appealing profile throughout the space, this series can provide all the combinations of lumen packages and distribution patterns that you need to get the job done.



S44/S66/S86



S956



Giant Foods, Hanover, PA
Classic series: S86
Photo credit: Terry Farrell




Sheboygan High School, WI
 Classic series: ES66
 Photo Credit: Bob Freund

To order a Classic product, select product data from each category below. Consult specification sheets available on our website – www.pmclighting.com to confirm availability of specific combinations of features and options.


MODEL NUMBER

1 – Series	2 – Output	3 – Mounting	4 – Lamp/Type	5 – Width	6 – Length	7 – Diffuser	8 – Color	9 – Voltage	10 – Options
------------	------------	--------------	---------------	-----------	------------	--------------	-----------	-------------	--------------


1 – Series:




EO830




EOV10




ER4/ER6/ER9



ER59



S44/S66/S86



S956

EO830—8x3 Oval Aluminum
 EO10—10" Oval Aluminum

ER4—4" Round Aluminum
 ER6—6" Round Aluminum
 ER9—9" Round Aluminum

ER59—5x9 Aluminum


S44—4x4 Steel Square
 S66—6x6 Steel Square
 S86—8x6 Steel Square

S956—9x6 Steel Square

Classic specification data:

The Classic series offers state of the art technology, clean aesthetics and multiple options in a timeless design to tailor a lighting solution for your specific application.

2 – Output:

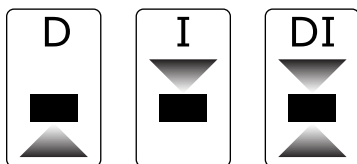

3 – Mounting

AC—Adjustable aircraft cable (48" standard) W—Wall
 P—Pendant mounting (24" standard) YAC—Y Configuration aircraft cable assembly
 SP—Swivel pendant (up to 45°) S—Surface

4 – Lamping Quantity & Type: 1/2/3 T5/T5HO/T8

5 – Widths: Specific to each unit 6 – Lengths: 2'/3'/4'/6'/8' Nominal length,
 custom lengths available

7 – Diffusers:

PBL—Semi-specular parabolic louver PL2— $\frac{3}{4}$ " paracube
 P12—Prismatic lens PL3—1 $\frac{1}{2}$ " paracube
 WB—White cross baffle RB—Aluminum radial cross baffle
 WOA—White acrylic lens AL—Ribbed acrylic
 FCA—Frosted clear acrylic BB—Bold baffle
 PL1— $\frac{1}{2}$ " paracube

8 – Color:

Finishes—Fixture finish is white polyester powder coated paint standard.
 Custom finishes are available. WHT (White) CA (Custom Finish)

9 – Voltage: 120/277/347

10 – Options:

DIM—Dimming, consult factory EM—Emergency, consult factory
 GLR—Fusing 2CIR—2 circuit wiring
 CC—Coiled cord feed TRK—Adaptable for track provided by other
 ROT—Rotation mounting DC—Dust cover
 W2W—Wall-to-wall mounting

Construction / Materials:

Aluminum housings are extruded with internal components of 20 gauge cold rolled steel. Steel units are die formed heavy gauge cold rolled steel. Louvers and lenses as indicated.



Labels—UL, CUL listed for damp location.

All fixtures are pre-wired and individually tested with electronic ballasts standard.



Data provided for general information. Consult product specification sheets at www.pmclighting.com for availability of specific combinations of features and options, full technical specifications and photometric data.

Sample photometry for typical Classic series:



To access our complete photometric data for this series, visit our website at www.pmcighting.com.

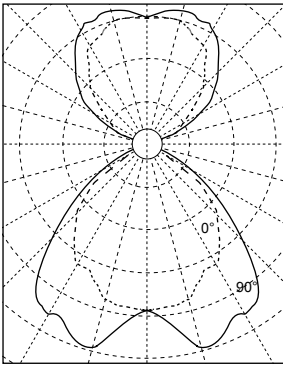

EOV10-DI-P-3/T8-4-PBL
(3) 2950 Lumen Lamps

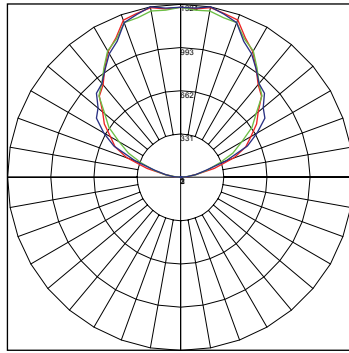

ER6-I-AC-2/T8
(2) 2950 Lumen Lamps

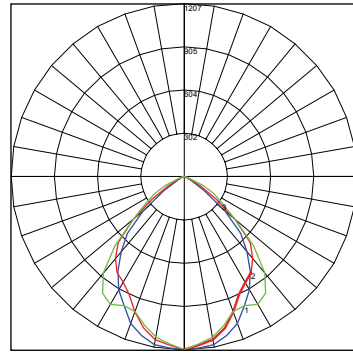

ES66D-AC-2/T8-PBL
(2) 2950 Lumen Lamps