

pūr-led powered by Vital Vio is putting light to work safely, effectively, and continuously to kill germs on indoor surfaces with the flip of a light switch.

FEATURES:

- Disinfecting LED Fixture.
- Various Disinfecting LED board options.
- Diffuser: Microlinear frosted lens.
- Finish: White Antimicrobial Polyester Powder Coat


SPECIFICATIONS:

Construction: The SC2134R-PÜR-LED is die formed from cold rolled steel.

Diffuser: 91% transmissive microlinear frosted lens.

Dimming: Fixtures supplied with 0-10V dimming down to 1% as standard. Other Dimming option are available (Consult Factory).*

Listing: Fixtures are cETLus listed for Damp Location.

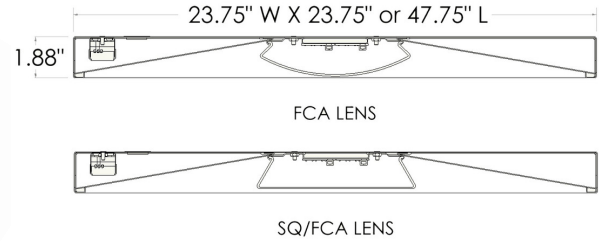

CONFIGURATION	WATTAGE/FT	LUMENS/FT	LUMENS/WATT
WLD	35	2156	62



WHITE LIGHT DISINFECTION MODE VS. ECO MODE

Use our 'White Light Disinfection® Mode' as a replacement for standard overhead lighting that provides both continuous disinfection and safe illumination and our 'Eco Mode,' which emits a higher dosage of Vital Vio's antimicrobial wavelengths, as a disinfection maintenance mode for when full illumination is not required.

With the flip of a switch, pūr-led luminaires can be shifted from White Light Disinfection Mode to Eco Mode; both modes work to constantly protect environmental surfaces from harmful bacteria, while still remaining equally safe for humans and animals.**

FIXTURE/TYPE(S):

PROJECT:

SC2134RPL

SERIES

MOUNTING

LED BOARDS

COLOR TEMP

WIDTHxLENGTH

DIFFUSER

FINISH

UNV

VOLTAGE

OPTIONS

MOUNTING:

- T - STANDARD T-BAR CEILING
- FL - FLANGED (FLANGE KIT PROVIDED)

WIDTHxLENGTH

- 2'X2' - 4000LM - 77W
- 2'X4' - 8000LM - 154W

VOLTAGE:

- UNV - UNIVERSAL (120/277V)

LED BOARDS:

- WLD - WHITE LIGHT DISINFECTION
- DM - DUAL MODE (WHITE LIGHT DISINFECTION W/ECO MODE)
- SWEM - NON-DISINFECTING WHITE LIGHT WITH ECO MODE

DIFFUSER:

- FCA - ROUND
- SQ/FCA - SQUARE

FINISH:

- WHT - WHITE ANTIMICROBIAL POLYESTER POWDER COAT
- CA - CUSTOM COLORS (CONSULT FACTORY)

OPTIONS:

- GLR - IN LINE FUSING
- EM - EMERGENCY DRIVERS
- CB - CONTROL BOARD (FOR DM/SWEM LED BOARDS, ALLOWS FOR SWITCHING BETWEEN WHITE LIGHT AND ECO MODE)

COLOR TEMPERATURE:

- 41K - (WLD, DM AND SWEM LED BOARDS)
- 27K - (SWEM ONLY)
- 30K - (SWEM ONLY)
- 35K - (SWEM ONLY)

*Dimming can reduce disinfection dosage below recommended 500Lux level.
**The International Electrotechnical Commission - the international standards organization that prepares and publishes International Standards for all electrical, electronic and related technologies - has certified, as administered by Underwriter's Laboratory (UL), that products Powered by Vital Vio are safe for continuous exposure and unrestricted use

Some options may not be available in all combinations - all fixture configurations subject to final factory approval.
Specifications and Dimensions are subject to change without notice.
Consult factory or visit www.pmclighting.com for specific installation instructions.